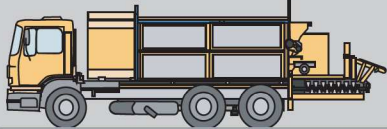

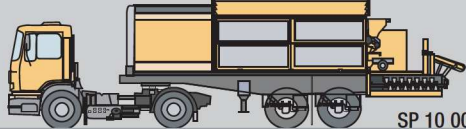
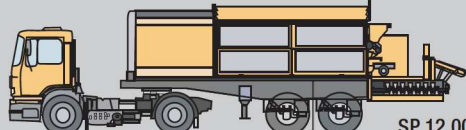


## The BREINING line

SLURRY PAVER	Capacities (litres)	Daily production at 10 Kg/m <sup>2</sup>
 SP 6 000	Aggregates: 6 000 Emulsion: 2 000 Water: 2 000 Cement: 600 Dope: 300	1,200 m <sup>2</sup> per load, or 7,200 m <sup>2</sup> per day
 SP 8 000	Aggregates: 8 000 Emulsion: 2 000 Water: 2 000 Cement: 600 Dope: 300	1,500 m <sup>2</sup> per load, or 9,200 m <sup>2</sup> per day
 SP 10 000	Aggregates: 10 000 Emulsion : 5 000 Water: 4 000 Cement: 600 Dope: 500	1,800 m <sup>2</sup> per load, or 10,800 m <sup>2</sup> per day
 SP 12 000	Aggregates: 12 000 Emulsion : 5 000 Water: 4 000 Cement: 600 Dope: 500	2,100 m <sup>2</sup> per load, or 12,600 m <sup>2</sup> per day

Joint spreading	Spreading type	Type of chassis	Binder capacity	Heating
<b>AFU/FU</b>	Lance	Trailer and skid	500 litres	Thermo-fluid heating
<b>AFU/FU KOMPRESSOR</b>	Lance	Trailer and skid	500 litres	Thermo-fluid heating
<b>SPM</b>	Bar	Skid	90/250/500 litres	Thermo-fluid heating

Crack cleaning	Type of distribution	Air assisted	Gas pressure	Heating
<b>HOT DOG</b>	Thermal lance	By independent compressor	3,5 bars	Gas

Asphalt production	Type of distribution	Type of chassis	Production	Heating
<b>BELUGA BB5</b>	Manual	Trailer	5 tonnes/hour	Direct heating

Binder spraying	Type of spreading	Spreading width	Capacity	Heating
<b>FA0</b>	Bar and lance	2.50 m	800 litres	Direct heating
<b>U TANK V2</b>	Bar	2.50 to 5.00 m	emulsion/water/fuel: 1 000 to 7 000 litres	Direct heating
<b>SMART</b>	Bar and lance	2.50 m	1 300 to 2 000 litres	Direct heating